




NAME: LED Canopy Light

P/N: SS-CN-150W

### Advantage:

- PHILIPS Chip, high CRI
- Mean Well IP65 driver, input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

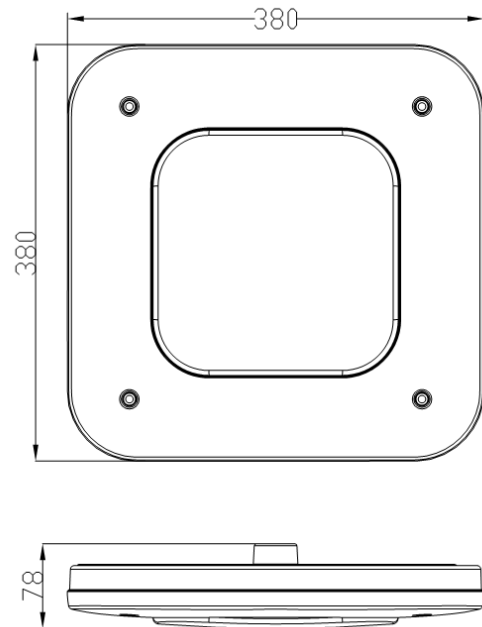

### Application:

- ◆ Gas station

### Product Specifications

Product name	LED Canopy Light
Part No	SS-CN-150W
Light Type	Canopy Light
Dimension	380*380*78mm

### Technical Characteristic

Color temperature	2700-7000K
CRI	>70
Lumen	15000-16500LM
Input Power	150W
Viewing Angle	110 Degree
Input Voltage	AC100-277V 50/60Hz
Driver model	HLG-150H-48A (Mean Well Driver )
PFC	>0.9
Waterproof Rating	IP65

### Materials

LED Brand	PHILIPS
LED Type	3030, 1.5W
LED QTY	182 PCS
Housing	Aluminum
Housing color	White



### Others

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Outdoor
Safety Certification	UL, cUL, CE, RoHS
Warranty Time	5 Years

### Package

**Lamps Net Weight: 6.3Kg/pcs**

	Size	Qty/Carton	Weight/Carton
Outer box	425*420*120mm	1	7.2 kg

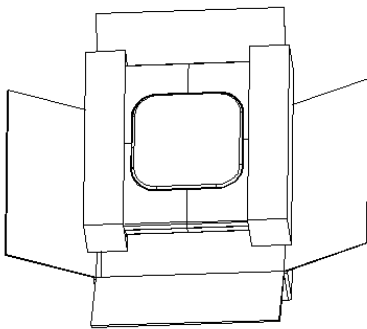

### Notice For User

- ◆ Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

### Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection